

Product Data Sheet

RF-112 RHINOZ Stucco Flex

PRODUCT DESCRIPTION

RHINOZ Stucco Flex is 100% acrylic based, used as a decorative textured coating with unlimited unique finish as per your design. It is flexible and cover cracks well, suitable for wall and ceiling for exterior and interior application. It is applied easily using hopper gun, trowel, and paint roller. It contains active biocides to resist growth of mold and mildew, ensures long durability and weather resistant properties. It can be used over variety of common substrate materials, both new and old surfaces such as concrete, fiber cement, gypsum board, etc.

PRODUCT ADVANTAGES

Good adhesion
 High flexibility
 Cover cracks well
 High strength and durability
 Good weather resistance
 Interior and exterior use
 Safe and environmentally friendly
 Antimicrobial

TECHNICAL DATA

Base : Acrylic polymer
 Appearance : Viscous paste
 pH : 9.0 - 11.0
 Density : 1.5 - 1.7 g/cm
 Surface dry : 15 - 20 minutes (Depend on condition)
 Top coating/painting : 24 hours (Depend on condition)
 Full cure time : 7 days (Depend on condition)

PACKING DATA

5 kg	4 units/ carton	30 cartons/ 1 full pallet
25 kg	1 unit/ carton	36 carton/ 1 full pallet

COVERAGE

1.5 kg/ sqm for 1 mm thickness (depend on texture)

TOOLS & EQUIPMENT

Hopper Gun (2-3 mm nozzle is recommended), Paint Roller, Trowel, PVC Roller

RECOMMENDED USES

Modern / Contemporary style of residence or building
 Exterior & Interior Wall Restaurant & Café
 Gallery Studio Theme Park
 Resort & Hotel Architectural Landmark
 Large wall area that needs fast application

RECOMMENDATION

- Store in dry place with 1 year shelf life in the original unopened packing, at the temperature under 50 °C.
- Do not mix the product with water, as the product is ready-to-use.
- Not recommend to use on floor area, and on surface that is always in contact with water or moisture e.g. swimming pool, shower recess area, etc.
- In case the product is not yet finished up, close the package lid tightly.

APPLICATION PROCESS

- The surface must be clean, dry, structurally sound, and free from other materials that will have effect on adhesion.
- Apply 1 coat of RHINOZ Primer Bonding, then leave it dry for 15-30 minutes. Not recommend to leave the surface too long after applied primer, as the surface might be collecting some dust.
- Spray RHINOZ Stucco Flex with hopper gun to create texture. Roller or trowel also can be used for application and creating texture. Leave it dry for 15-20 minutes.
- To flatten out the stucco surface for smoother look or soft-edged knock down texture, press a wet PVC roller over the stucco while it is not yet dried (optional).
- Leave it to completely dry at least 12 -24 hours or over night before applying RHINOZ Acrylic Top (W) or RHINOZ Acrylic Top (S) or RAY Decorative Paints. The stucco surface will be completely cured in 7 days.

Sealer Types


Area

RHINOZ Acrylic Top (W) <i>(water-based)</i>	Internal area
RHINOZ Acrylic Top (S) <i>(solvent-based)</i>	External area
RAY Decorative Paints	

TEXTURE & COLOR OPTIONS

The RHINOZ Stucco Flex is white in color. In case of to topping with paint, after the stucco layer dried, can directly apply RAY Decor paint, including RAY Multi Shield, RAY Premium Shield, RAY Decor Finish, RAY Super Shiny, or other paints with equivalent properties.

FINE Spray
NATURAL Texture

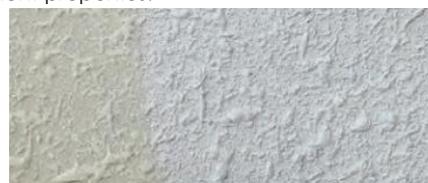

LARGE Spray
NATURAL Texture



FINE Spray
SOFT-EDGED Texture



LARGE Spray
SOFT-EDGED Texture

